

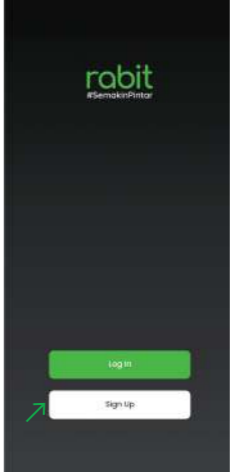
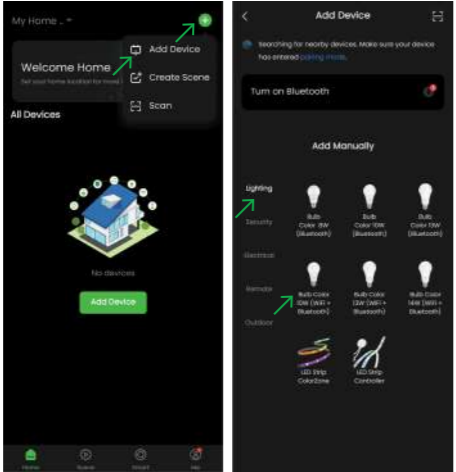
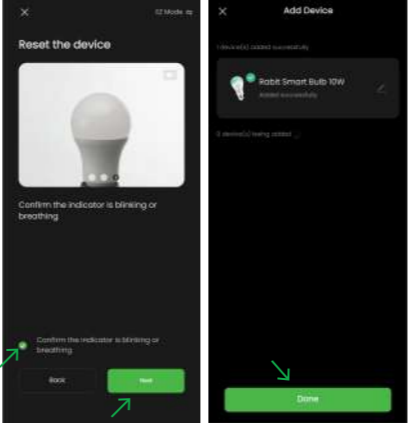


Smart Bulb Color 10W (WiFi+Bluetooth) - Spesifikasi & Tutorial Pairing

<p>Buku Panduan</p> 	<p>Unduh Aplikasi Rabit Smart & Video Tutorial</p> 	<p>Spesifikasi</p> <p>Smart Bulb 10W RGBCW WiFi + Bluetooth</p> <p>Model : Smart Bulb 10W WiFi + Bluetooth v1 WiFi : 802.11 b/g/n 2.4 Ghz Bluetooth : BLE iBeacon Voltage : 220-240V 50 Hz Braket : e27 Masa Pakai : >20.000 Jam Daya Maksimum : 10W Lumen Maksimum : 1000 lm Temperatur Warna : 2700-6500 K Dukungan Sistem : iOS & Android OS</p>	<p>1. Unduh Aplikasi Rabit Smart. 2. Registrasi Akun.</p> 
<p>3. Pastikan Smartphone terkoneksi dalam jaringan WiFi dan on Bluetooth, lalu tambahkan Perangkat.</p> 	<p>4. Pasang perangkat, untuk reset, nyalakan dan matikan sakelar lampu sebanyak tiga kali (nyala-mati-nyala-mati-nyala). Lampu akan berkedip cepat.</p> 	<p>5. Kontrol Perangkat, dengan tombol yang tersedia dan tombol "edit" untuk pengaturan lebih lanjut. 6. Untuk fungsi otomatis dan penggabungan dengan perangkat Rabit lain. Masuk ke menu "Scene" lalu pilih tombol "+".</p> 